Quick Start Guide

Outdoor ApplianceLinc™ - INSTEON® Plug-In Appliance On/Off Module
Model: 2456S3E

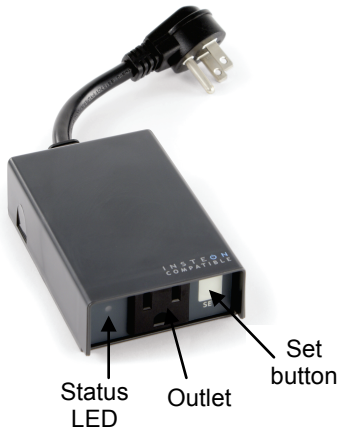

Introduction

ApplianceLinc allows you to remotely control any appliance/device outside your home at the touch of a button. Can be used with incandescent lamps up to 1800 Watts and inductive loads up to 15 Amps.

Installing Outdoor ApplianceLinc

1) Plug appliance/device (also called the load) you want to control into ApplianceLinc outlet
2) Plug ApplianceLinc into unswitched wall outlet
   Status LED will turn on solid green
   The load will turn on. (If load does not turn on, tap Set button.)
3) Allow ApplianceLinc to hang down from outlet (see image)

Make ApplianceLinc a Responder

Control ApplianceLinc from another INSTEON device:
1) Use Set button to adjust ApplianceLinc to desired state (on or off)
2) Put controller into linking mode.* (For most controllers press and hold Set button for 3 seconds or an on/scene button for 10 seconds.)
3) Press and hold ApplianceLinc Set button until it double-beeps
   Status LED will turn on solid green if load is on or solid red if it is off
4) Confirm link by tapping controller's button on and off
   Connected light/load will turn on and off

Owner's Manual and Tech Support

For the complete Owner's Manual and the current Quick Start Guide visit http://www.insteon.com/support
Call: INSTEON Support Line at 800-762-7845

*Linking mode will time out after 30 seconds

2456S3E Rev. 7/18/2012 4:04 PM / See Owner's Manual for Warranty Information.
Protected under U.S. and foreign patents (see www.insteon.com)
© Copyright 2012 INSTEON, 16542 Millikan Ave., Irvine, CA 92606, 800-762-7845

INSTEON®